


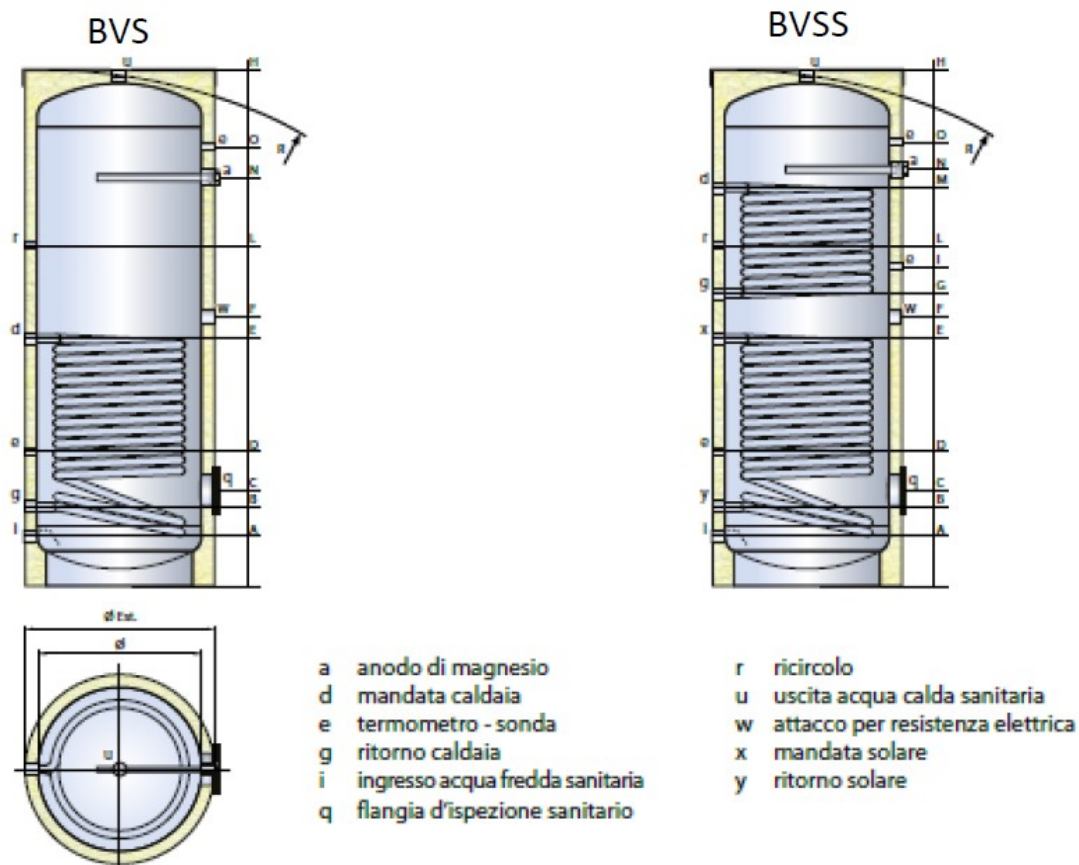

Modello	Dimensioni (mm)				Scambiatore (Mq)		Peso DSFI (Kg)
	Ø	H	Ø Est **	R*	Inf.	Sup.	
BV 200	450	1305	550	1430	0,90	0,50	59
BV 300	500	1595	600	1720	1,30	0,85	78
BV 400	650	1395	750	1600	1,60	0,90	89
BV 500	650	1645	750	1820	1,95	1,10	104
BV 800	790	1750	990	1745	2,70	1,50	148
BV 1000	790	2110	990	2095	3,00	1,90	173
BV 1500	1000	2115	1200	2145	3,70	2,30	252
BV 2000	1100	2435	1300	2465	4,80	3,00	331

* Per le capacità da 200 a 500 Lt la diagonale di ribaltamento è riferita al serbatoio colbentato

** Tutti gli isolamenti sono rimovibili tranne per i modelli da 150 a 500 Lt

Modello	Dimensioni (mm)												Attacchi (gas)						
	A	B	C	D	E	F	G	I	L	M	N	O	a	dgxy	e	lu	r	w	q
BV 200	110	190	260	340	630	690	740	850	840	950	980	1090	1"1/4	1"	1/2"	1"	1/2"	1"1/2	120/180
BV 300	120	230	300	405	790	845	900	1050	1050	1200	1250	1365	1"1/4	1"	1/2"	1"	1/2"	1"1/2	120/180
BV 400	145	240	310	375	690	745	800	900	900	1000	1030	1140	1"1/4	1"	1/2"	1"	1/2"	1"1/2	120/180
BV 500	145	240	310	395	840	895	950	1095	1095	1250	1280	1390	1"1/4	1"	1/2"	1"	1/2"	1"1/2	120/180
BV 800	170	275	345	425	870	940	1010	1095	1200	1385	1250	1425	1"1/4	1"	1/2"	1"1/2	1"	1"1/2	120/180
BV 1000	170	275	345	430	1020	1090	1160	1280	1400	1635	1450	1770	1"1/4	1"	1/2"	1"1/2	1"	1"1/2	120/180
BV 1500	230	375	475	530	1110	1180	1250	1345	1460	1675	1490	1740	1"1/4	1"	1/2"	2"	1"	1"1/2	220/290
BV 2000	325	465	585	620	1350	1420	1490	1625	1755	2015	1830	2035	1"1/4	1"	1/2"	2"	1"	1"1/2	220/290